

### SPECIFICATION

|  |           |                        |           |          |     |
|--|-----------|------------------------|-----------|----------|-----|
| CAPACITY                                       |           |                        | 35,000LBS |          |     |
| FOUR COLUMNS C/W HYDRAULIC CYLINDERS           |           |                        |           |          |     |
| SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR) |           |                        |           |          |     |
| DUAL POWER UNITS<br>C/W EL. MOTORS             | STANDARD  | 2 x 2HP, 3PH, 230/460V |           |          |     |
|  | OPTIONAL  | 2 x 2HP, 3PH, 575V     |           |          |     |
|  | OPTIONAL  | 2 x 2HP, 1PH, 230V     |           |          |     |
| SPEED OF RISE                                  | 72 SEC.   |                        |           |          |     |
| RUNWAY WIDTH                                   | 24" - 30" |                        | DISTANCES |          |     |
| RUNWAY HEIGHT                                  | 8-3/4"    |                        | "A"       | "B"      | "C" |
| MODEL: PK35-4-21                               | 21' LONG  | 321"                   | 247 1/2"  | 267 1/2" |     |
| MODEL: PK35-4-24                               | 24' LONG  | 357"                   | 283 1/2"  | 303 1/2" |     |
| MODEL: PK35-4-25                               | 25' LONG  | 369"                   | 295 1/2"  | 315 1/2" |     |
| MODEL: PK35-4-26                               | 26' LONG  | 381"                   | 307 1/2"  | 327 1/2" |     |
| MODEL: PK35-4-28                               | 28' LONG  | 405"                   | 331 1/2"  | 351 1/2" |     |
| MODEL: PK35-4-30                               | 30' LONG  | 429"                   | 355 1/2"  | 375 1/2" |     |
| MODEL: PK35-4-31                               | 31' LONG  | 441"                   | 367 1/2"  | 387 1/2" |     |
| MODEL: PK35-4-32                               | 32' LONG  | 453"                   | 379 1/2"  | 399 1/2" |     |
| MODEL: PK35-4-33                               | 33' LONG  | 465"                   | 391 1/2"  | 411 1/2" |     |
| MODEL: PK35-4-34                               | 34' LONG  | 477"                   | 403 1/2"  | 423 1/2" |     |
| INSIDE COLUMN CLEARANCE                        | 132"      |                        |           |          |     |
| OVERALL LIFTING HEIGHT                         | 68 3/4"   |                        |           |          |     |
| OVERALL HEIGHT                                 | 12'-4"    |                        |           |          |     |
| OVERALL WIDTH                                  | 13'-10"   |                        |           |          |     |
| OPTIONAL - ROLLING JACKING BEAM                |           |                        |           |          |     |

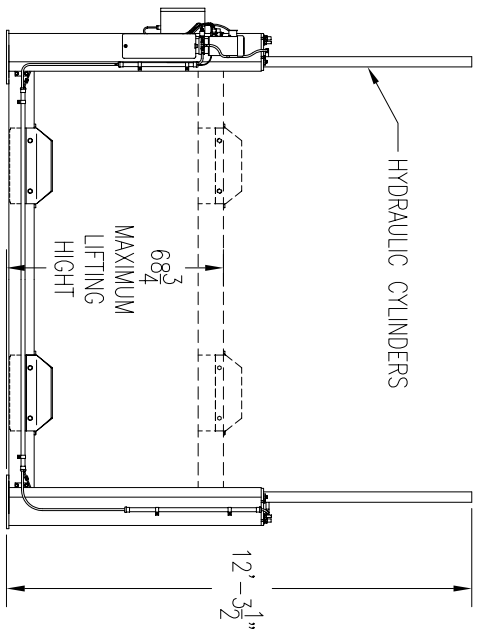
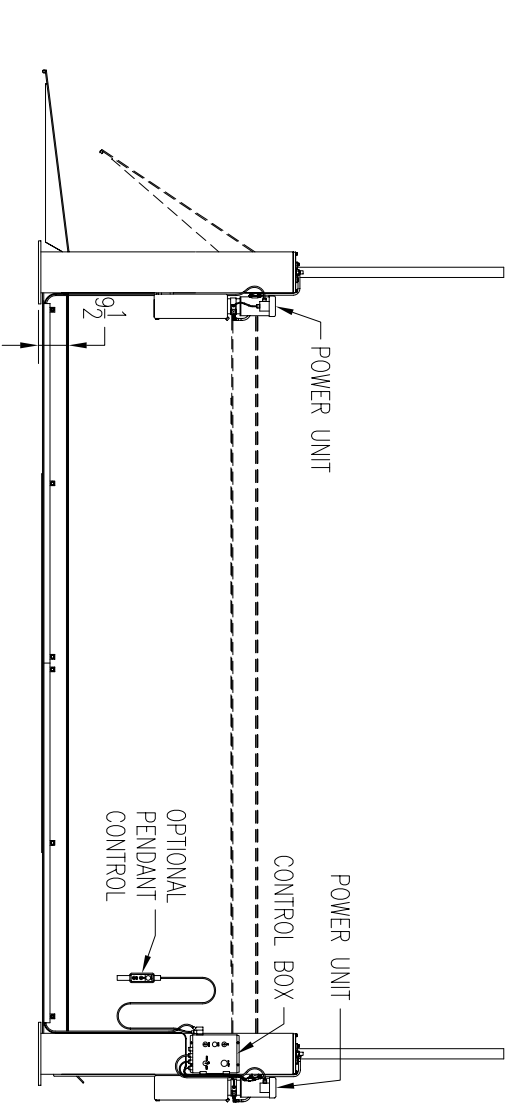
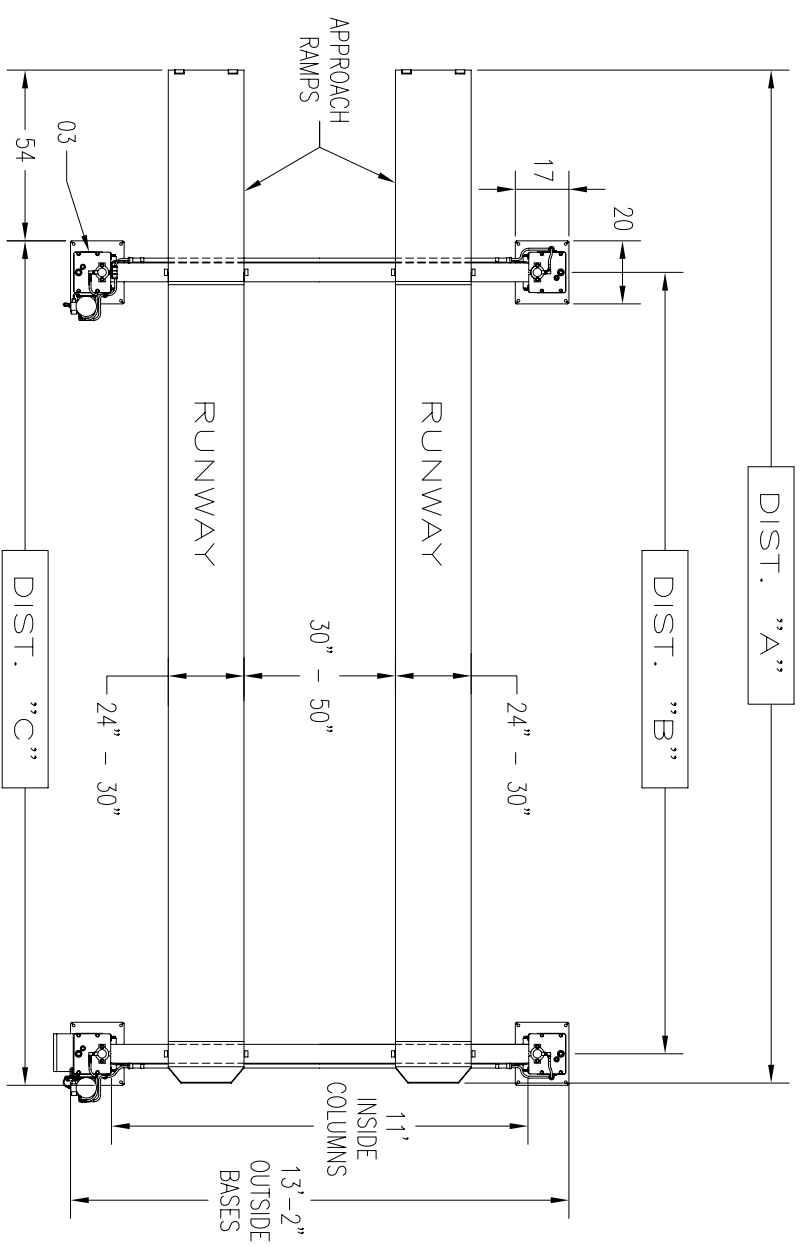


FIG.01

### SPECIFICATION

|  |          |                        |  |
|--|----------|------------------------|--|
| CAPACITY                                       |          | 35,000LBS              |  |
| FOUR COLUMNS C/W HYDRAULIC CYLINDERS           |          |                        |  |
| SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR) |          |                        |  |
| DUAL POWER UNITS<br>C/W EL. MOTORS             | STANDARD | 2 x 2HP, 3PH, 230/460V |  |
|  | OPTIONAL | 2 x 2HP, 3PH, 575V     |  |
|  | OPTIONAL | 2 x 2HP, 1PH, 230V     |  |

SPEED OF RISE 72 SEC.

RUNWAY WIDTH 24" - 30"

| RUNWAY HEIGHT    | DISTANCES |      |          |
|------------------|-----------|------|----------|
| 8-3/4"           | "A"       | "B"  | "C"      |
| MODEL: PK35-4-21 | 21' LONG  | 321" | 247 1/2" |
| MODEL: PK35-4-24 | 24' LONG  | 357" | 283 1/2" |
| MODEL: PK35-4-25 | 25' LONG  | 369" | 295 1/2" |
| MODEL: PK35-4-26 | 26' LONG  | 381" | 307 1/2" |
| MODEL: PK35-4-28 | 28' LONG  | 405" | 331 1/2" |
| MODEL: PK35-4-30 | 30' LONG  | 429" | 355 1/2" |
| MODEL: PK35-4-31 | 31' LONG  | 441" | 367 1/2" |
| MODEL: PK35-4-32 | 32' LONG  | 453" | 379 1/2" |
| MODEL: PK35-4-33 | 33' LONG  | 465" | 391 1/2" |
| MODEL: PK35-4-34 | 34' LONG  | 477" | 403 1/2" |

#### RUNWAYS LENGTH

|                  |          |      |          |
|------------------|----------|------|----------|
| MODEL: PK35-4-31 | 31' LONG | 441" | 367 1/2" |
| MODEL: PK35-4-32 | 32' LONG | 453" | 379 1/2" |
| MODEL: PK35-4-33 | 33' LONG | 465" | 391 1/2" |
| MODEL: PK35-4-34 | 34' LONG | 477" | 403 1/2" |

|                                 |         |  |  |
|---------------------------------|---------|--|--|
| INSIDE COLUMN CLEARANCE         | 132"    |  |  |
| OVERALL LIFTING HEIGHT          | 68 3/4" |  |  |
| OVERALL HEIGHT                  | 12'-4"  |  |  |
| OVERALL WIDTH                   | 13'-10" |  |  |
| OPTIONAL - ROLLING JACKING BEAM |         |  |  |

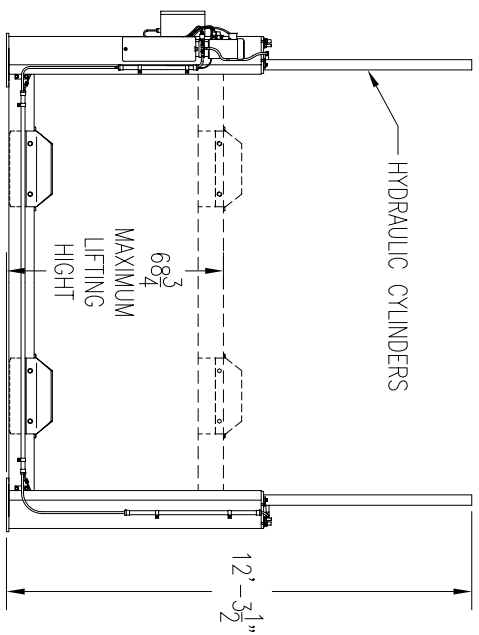
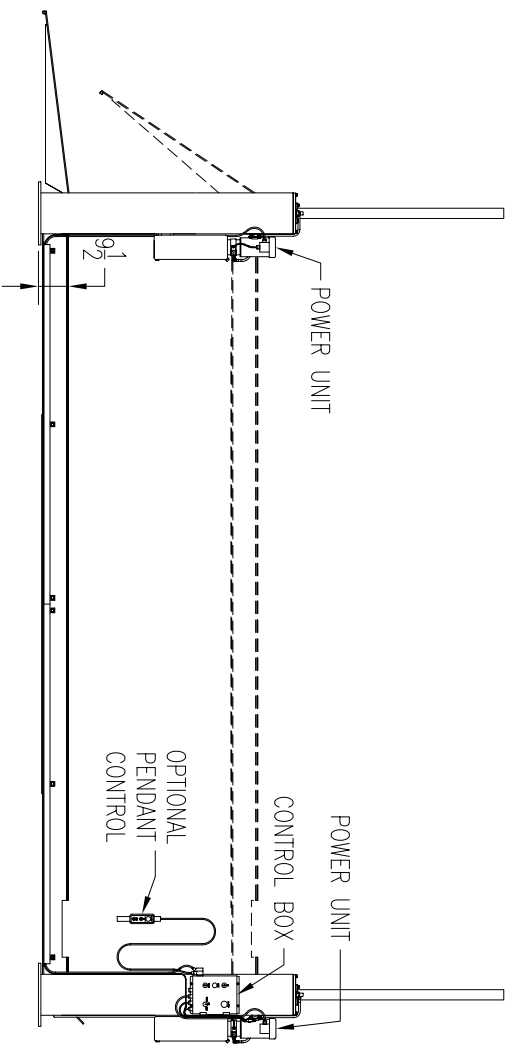
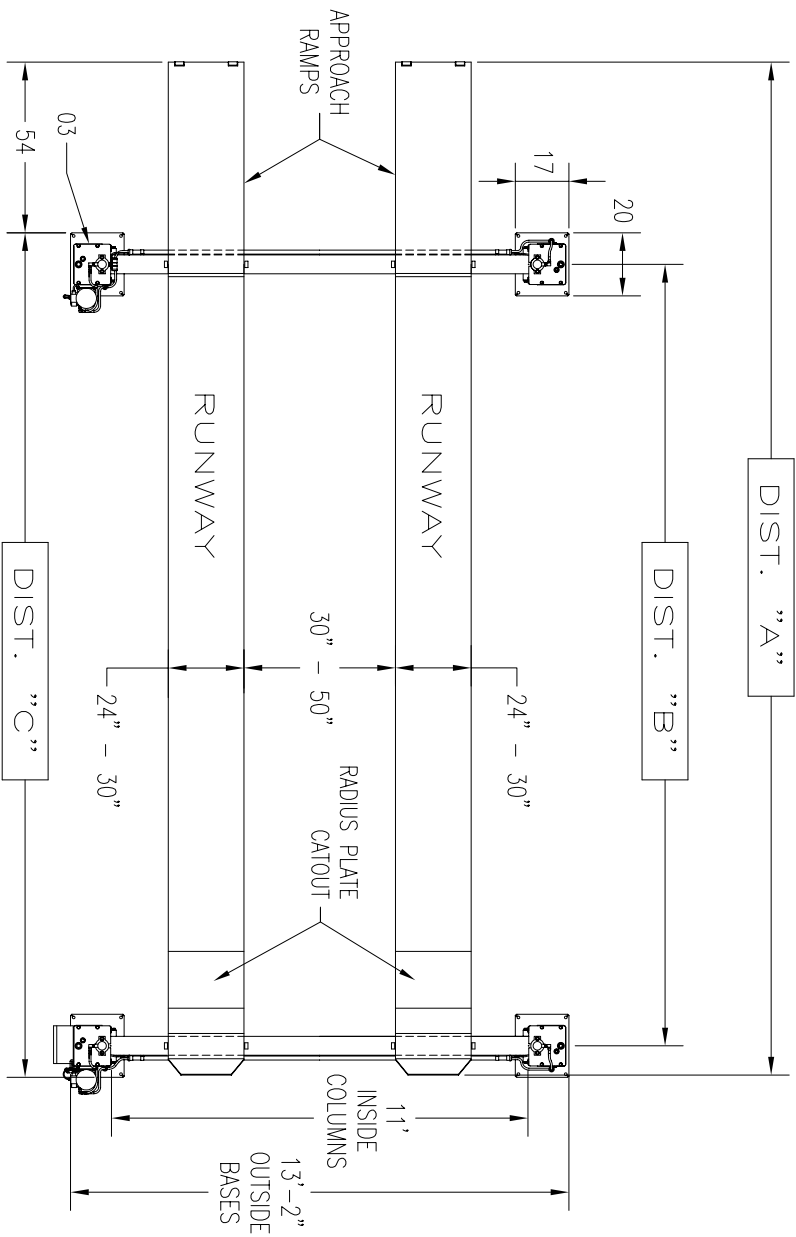


FIG.01

P K S 4-POST LIFTS SPECIFICATION

MODEL: PK35-4A

DATE: FEB.12/2008

DWG.NO. PK35.4A.01 A

### SPECIFICATION

|  |           |                        |           |      |      |
|--|-----------|------------------------|-----------|------|------|
| CAPACITY                                       |           |                        | 35,000LBS |      |      |
| FOUR COLUMNS C/W HYDRAULIC CYLINDERS           |           |                        |           |      |      |
| SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR) |           |                        |           |      |      |
| DUAL POWER UNITS C/W EL. MOTORS                | STANDARD  | 2 x 2HP, 3PH, 230/460V |           |      |      |
|  | OPTIONAL  | 2 x 2HP, 3PH, 575V     |           |      |      |
|  | OPTIONAL  | 2 x 2HP, 1PH, 230V     |           |      |      |
| SPEED OF RISE                                  |           | 72 SEC.                |           |      |      |
| RUNWAY WIDTH                                   | 24" - 30" |                        | DISTANCES |      |      |
| RUNWAY HEIGHT                                  | 8-3/4"    |                        | "A"       | "B"  | "C"  |
| MODEL: PK35-4-21DT                             | 21' LONG  |                        | 376"      | 247" | 267" |
| MODEL: PK35-4-24DT                             | 24' LONG  |                        | 412"      | 283" | 303" |
| MODEL: PK35-4-25DT                             | 25' LONG  |                        | 424"      | 295" | 315" |
| MODEL: PK35-4-26DT                             | 26' LONG  |                        | 436"      | 307" | 327" |
| MODEL: PK35-4-28DT                             | 28' LONG  |                        | 460"      | 331" | 351" |
| MODEL: PK35-4-30DT                             | 30' LONG  |                        | 484"      | 355" | 375" |
| MODEL: PK35-4-31DT                             | 31' LONG  |                        | 496"      | 367" | 387" |
| MODEL: PK35-4-32DT                             | 32' LONG  |                        | 508"      | 379" | 399" |
| MODEL: PK35-4-33DT                             | 33' LONG  |                        | 520"      | 391" | 411" |
| MODEL: PK35-4-34DT                             | 34' LONG  |                        | 532"      | 403" | 423" |
| INSIDE COLUMN CLEARANCE                        | 11'       |                        |           |      |      |
| OVERALL LIFTING HEIGHT                         | 5'-8 3/4" |                        |           |      |      |
| OVERALL HEIGHT                                 | 12'-4"    |                        |           |      |      |
| OVERALL WIDTH                                  | 13'-10"   |                        |           |      |      |
| OPTIONAL - ROLLING JACKING BEAM                |           |                        |           |      |      |

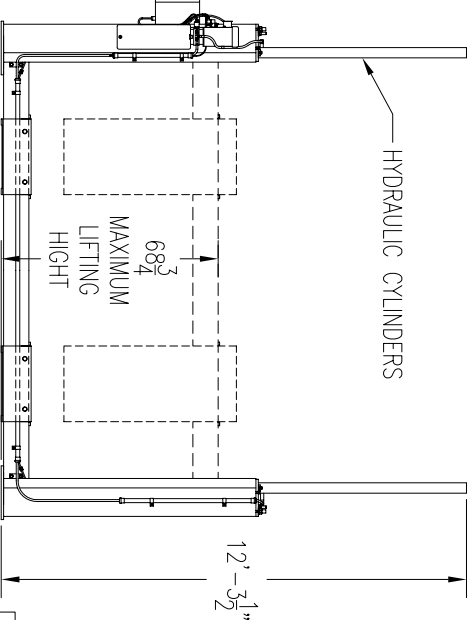
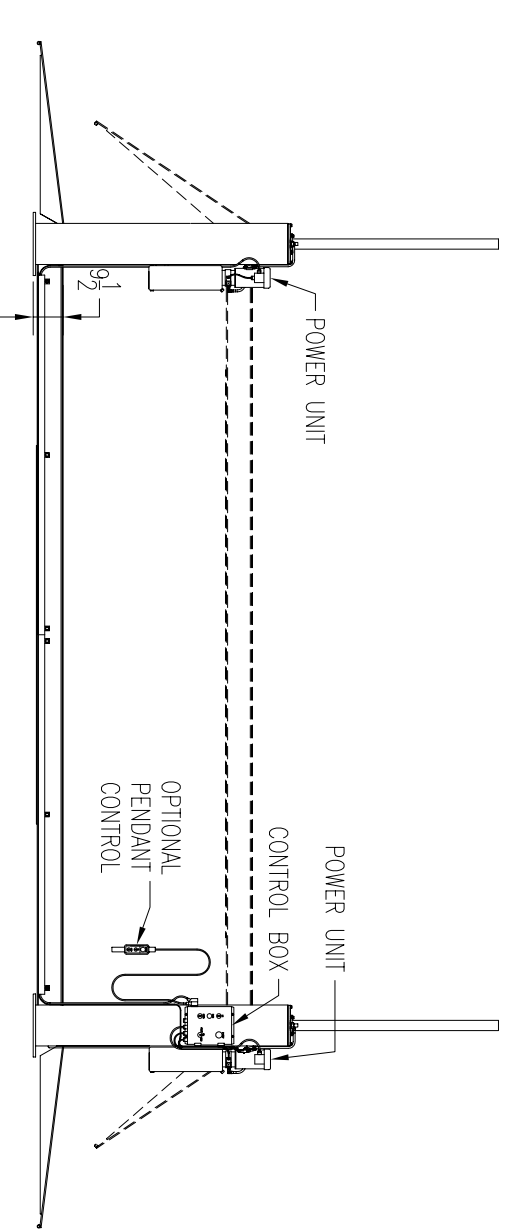
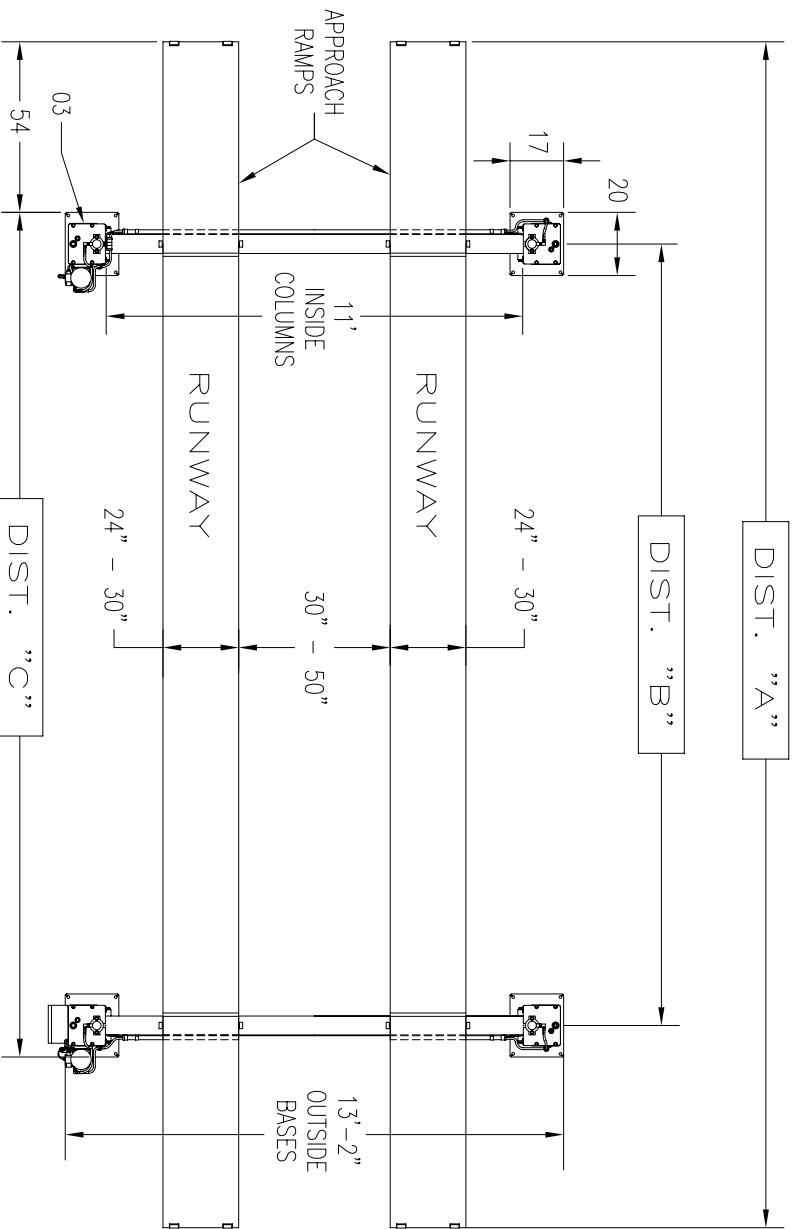


FIG.01.DT

P K S

DRIVE THROUGH  
4-POST LIFTS SPECIFICATION

MODEL:  
PK35-4-DT

DATE:  
FEB.12/2008

DWG.NO.  
PK35.4.DT.01 A