

SPECIFICATION

CAPACITY			40,000LBS		
FOUR COLUMNS C/W HYDRAULIC CYLINDERS					
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)					
DUAL POWER UNITS C/W EL. MOTORS	STANDARD	2 x 2HP, 3PH, 230/460V			
	OPTIONAL	2 x 2HP, 3PH, 575V			
	OPTIONAL	2 x 2HP, 1PH, 230V			
SPEED OF RISE		72 SEC.			
RUNWAY WIDTH		24" - 30"	DISTANCES		
RUNWAY HEIGHT		8-3/4"	"A"	"B"	"C"
MODEL: PK40-4-21		21' LONG	321"	247"	267"
MODEL: PK40-4-24		24' LONG	357"	283"	303"
MODEL: PK40-4-25		25' LONG	369"	295"	315"
MODEL: PK40-4-26		26' LONG	381"	307"	327"
MODEL: PK40-4-28		28' LONG	405"	331"	351"
MODEL: PK40-4-30		30' LONG	429"	355"	375"
MODEL: PK40-4-31		31' LONG	441"	367"	387"
MODEL: PK40-4-32		32' LONG	453"	379"	399"
MODEL: PK40-4-33		33' LONG	465"	391"	411"
MODEL: PK40-4-34		34' LONG	477"	403"	423"
INSIDE COLUMN CLEARANCE		132"			
OVERALL LIFTING HEIGHT		68 3/4"			
OVERALL HEIGHT		12'-4"			
OVERALL WIDTH		13'-10"			
OPTIONAL - ROLLING JACKING BEAM					

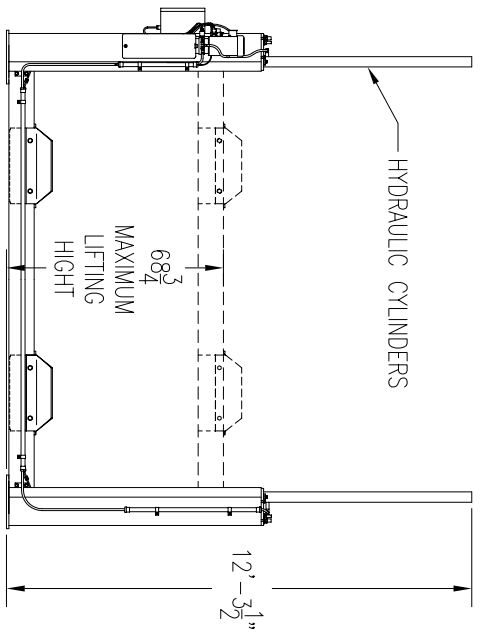
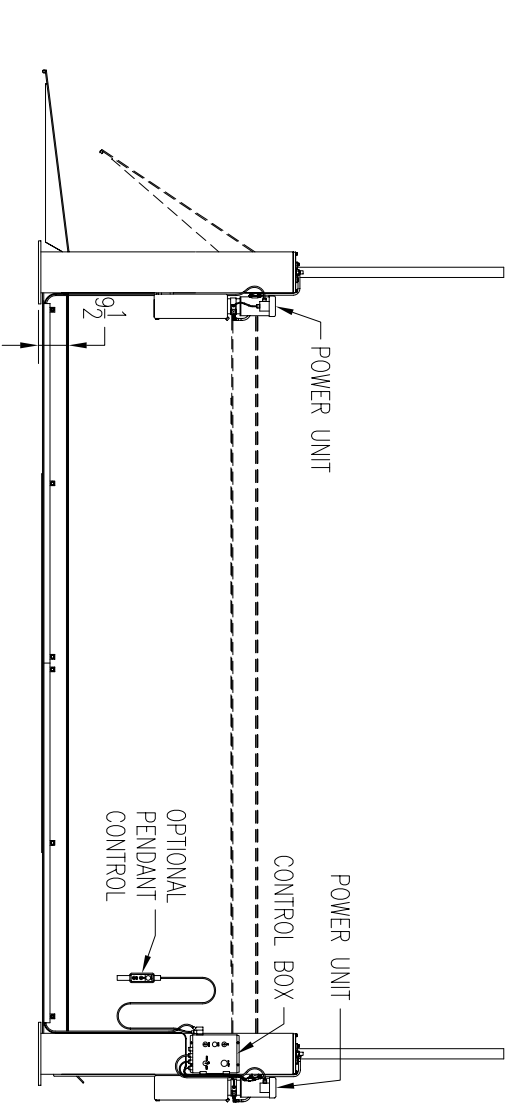
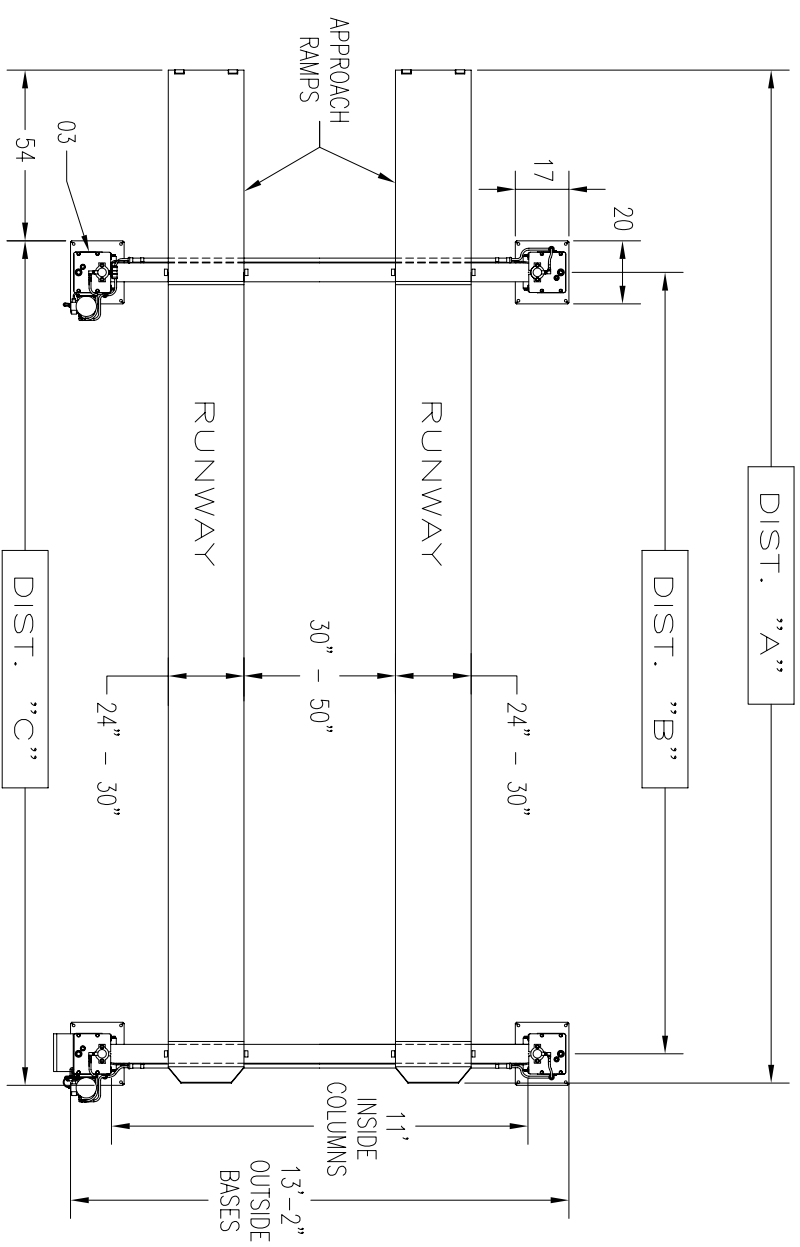


FIG.01

SPECIFICATION

CAPACITY			40,000LBS		
FOUR COLUMNS C/W HYDRAULIC CYLINDERS					
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)					
DUAL POWER UNITS C/W EL. MOTORS	STANDARD	2 x 2HP, 3PH, 230/460V			
	OPTIONAL	2 x 2HP, 3PH, 575V			
	OPTIONAL	2 x 2HP, 1PH, 230V			
SPEED OF RISE		72 SEC.			
RUNWAY WIDTH		24" - 30"	DISTANCES		
RUNWAY HEIGHT		8-3/4"	"A"	"B"	"C"
MODEL: PK40-4-21		21' LONG	321"	247"	267"
MODEL: PK40-4-24		24' LONG	357"	283"	303"
MODEL: PK40-4-25		25' LONG	369"	295"	315"
MODEL: PK40-4-26		26' LONG	381"	307"	327"
MODEL: PK40-4-28		28' LONG	405"	331"	351"
MODEL: PK40-4-30		30' LONG	429"	355"	375"
MODEL: PK40-4-31		31' LONG	441"	367"	387"
MODEL: PK40-4-32		32' LONG	453"	379"	399"
MODEL: PK40-4-33		33' LONG	465"	391"	411"
MODEL: PK40-4-34		34' LONG	477"	403"	423"
INSIDE COLUMN CLEARANCE		132"			
OVERALL LIFTING HEIGHT		68 3/4"			
OVERALL HEIGHT		12'-4"			
OVERALL WIDTH		13'-10"			
OPTIONAL - ROLLING JACKING BEAM					

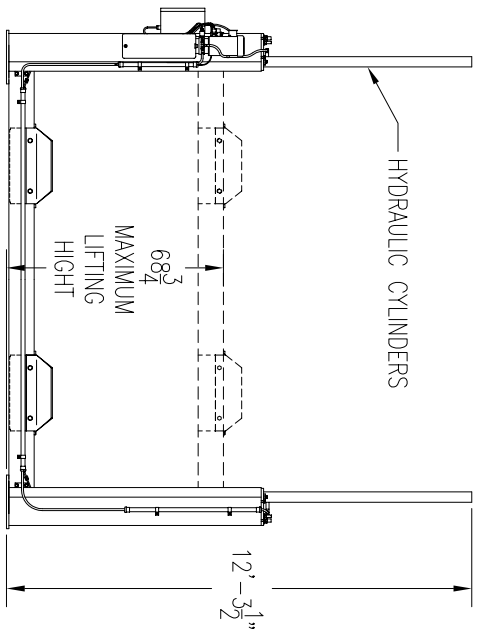
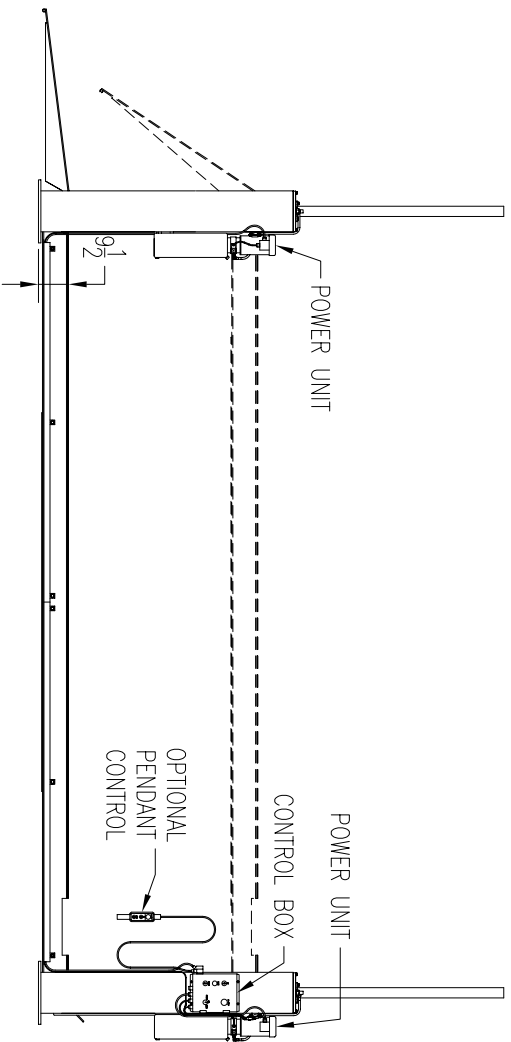
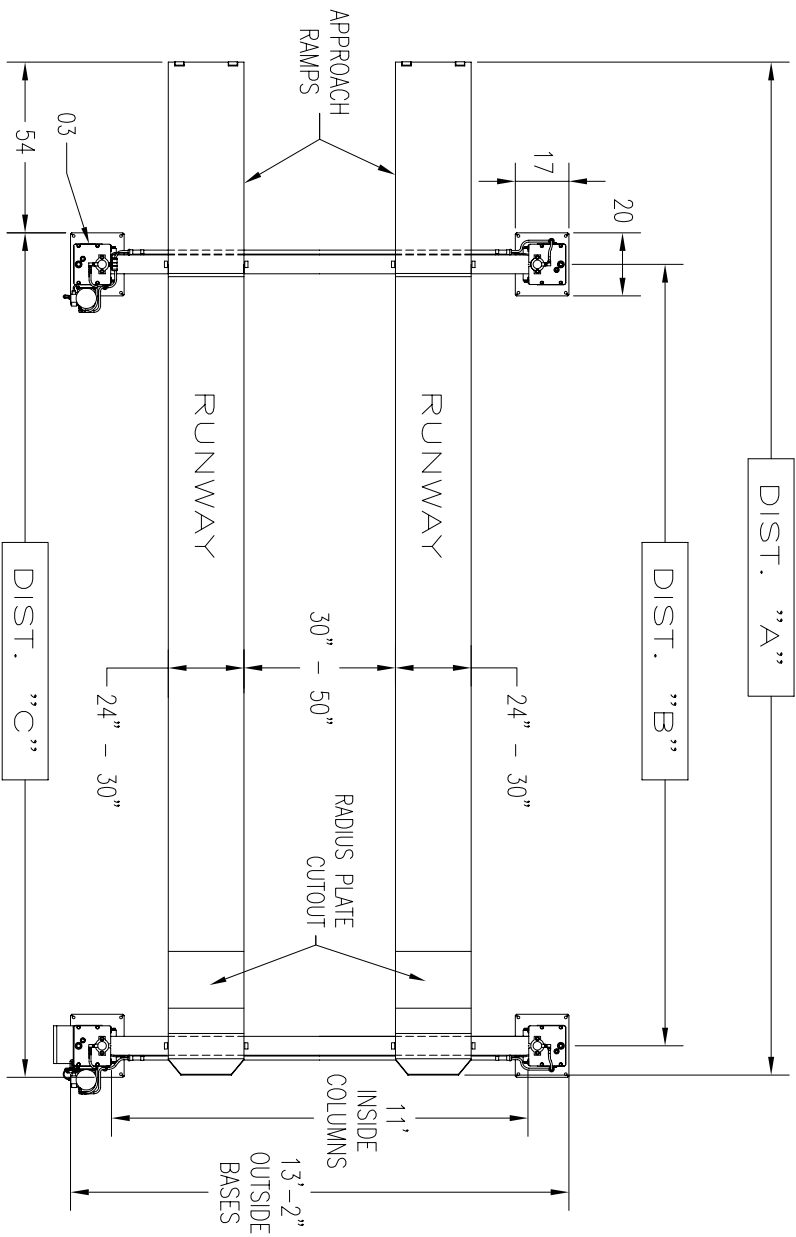


FIG.01

SPECIFICATION

CAPACITY			40,000LBS		
FOUR COLUMNS C/W HYDRAULIC CYLINDERS					
SAFETY DEVICES ON EACH COLUMN (MECHANICAL/AIR)					
DUAL POWER UNITS C/W EL. MOTORS	STANDARD	2 x 2HP, 3PH, 230/460V			
	OPTIONAL	2 x 2HP, 3PH, 575V			
SPEED OF RISE	STANDARD	2 x 2HP, 1PH, 230V			
	OPTIONAL	2 x 2HP, 1PH, 230V			
RUNWAY WIDTH	24" - 30"	DISTANCES			
RUNWAY HEIGHT	8-3/4"	"A"	"B"	"C"	
MODEL: PK40-4-21DT		21' LONG	376"	247 3/4"	267 3/4"
MODEL: PK40-4-24DT		24' LONG	412"	283 3/4"	303 3/4"
MODEL: PK40-4-25DT		25' LONG	424"	295 3/4"	315 3/4"
MODEL: PK40-4-26DT		26' LONG	436"	307 3/4"	327 3/4"
MODEL: PK40-4-28DT		28' LONG	460"	331 3/4"	351 3/4"
MODEL: PK40-4-30DT		30' LONG	484"	355 3/4"	375 3/4"
MODEL: PK40-4-31DT		31' LONG	496"	367 3/4"	387 3/4"
MODEL: PK40-4-32DT		32' LONG	508"	379 3/4"	399 3/4"
MODEL: PK40-4-33DT		33' LONG	520"	391 3/4"	411 3/4"
MODEL: PK40-4-34DT		34' LONG	532"	403 3/4"	423 3/4"
INSIDE COLUMN CLEARANCE	11'				
OVERALL LIFTING HEIGHT	5'-8 3/4"				
OVERALL HEIGHT	12'-4"				
OVERALL WIDTH	13'-10"				
OPTIONAL - ROLLING JACKING BEAM					

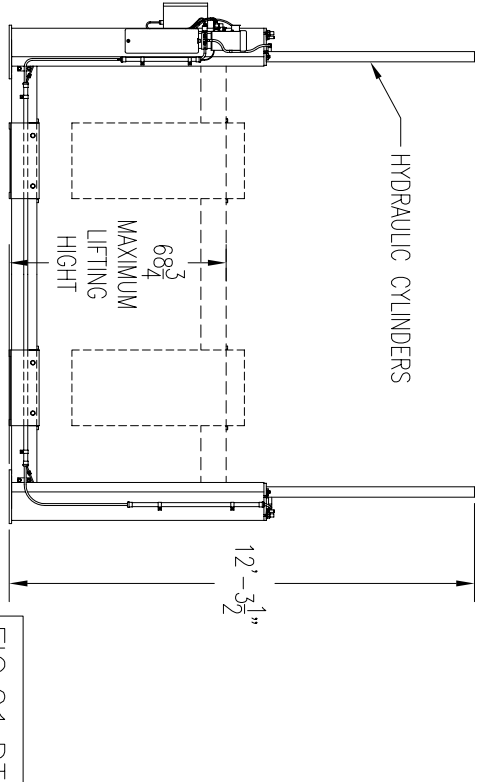
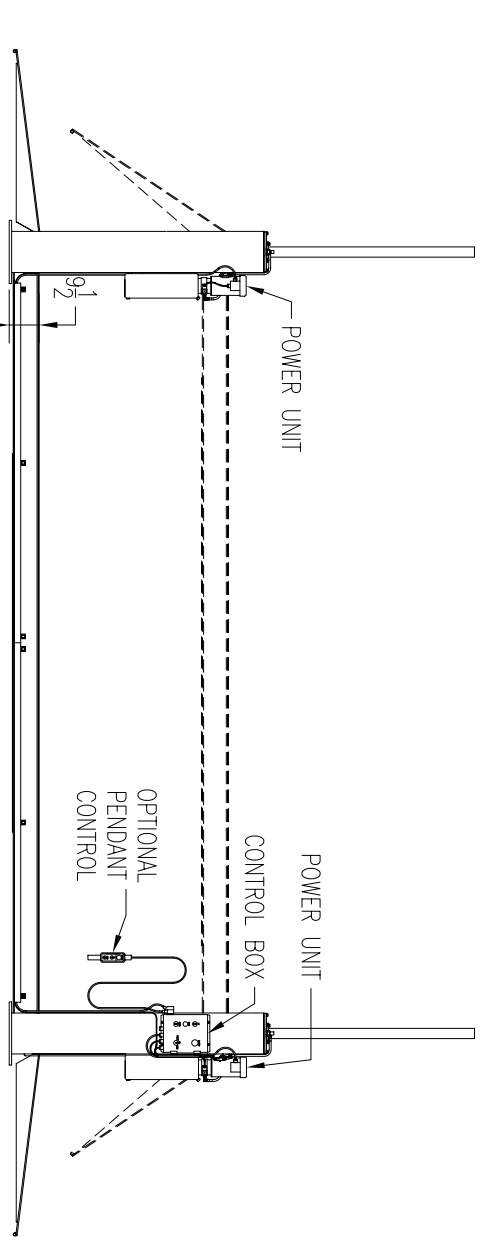
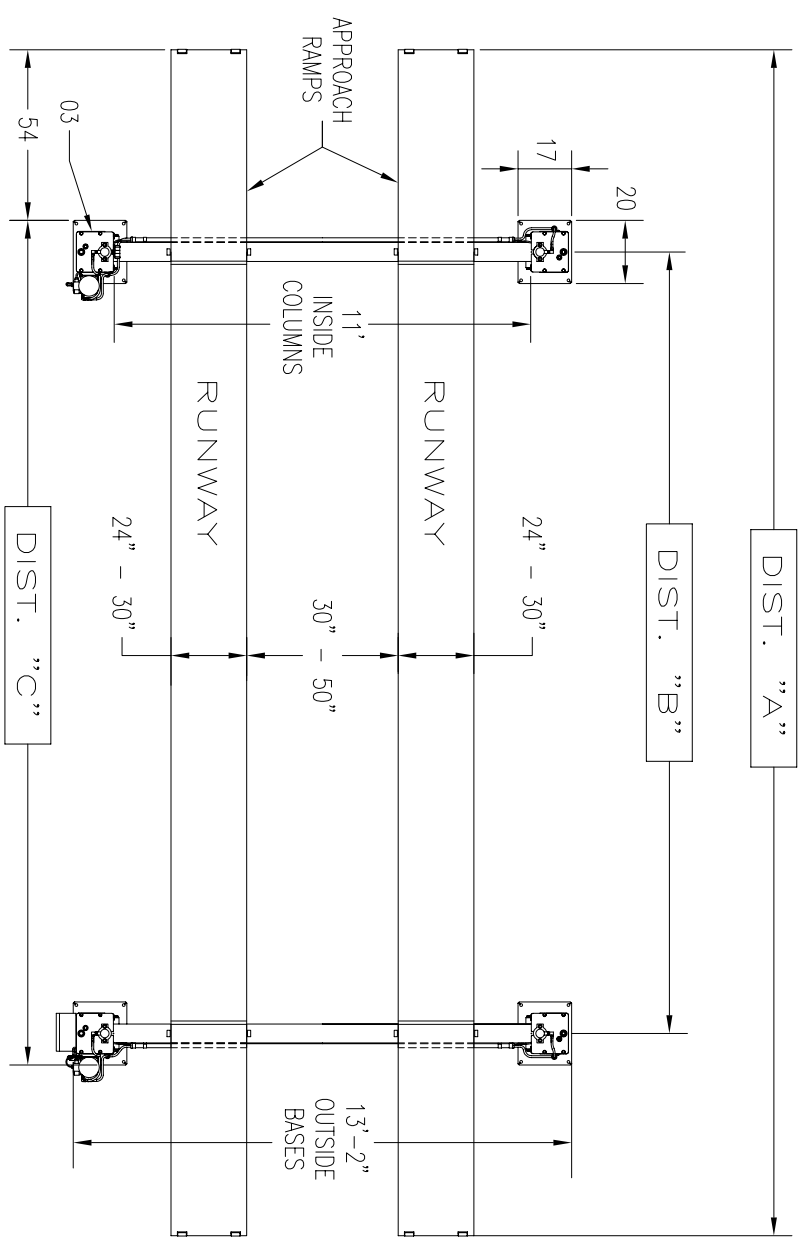


FIG.01.DT